



Optional equipment: Reclinable trellis jib 6.2 / 12 m

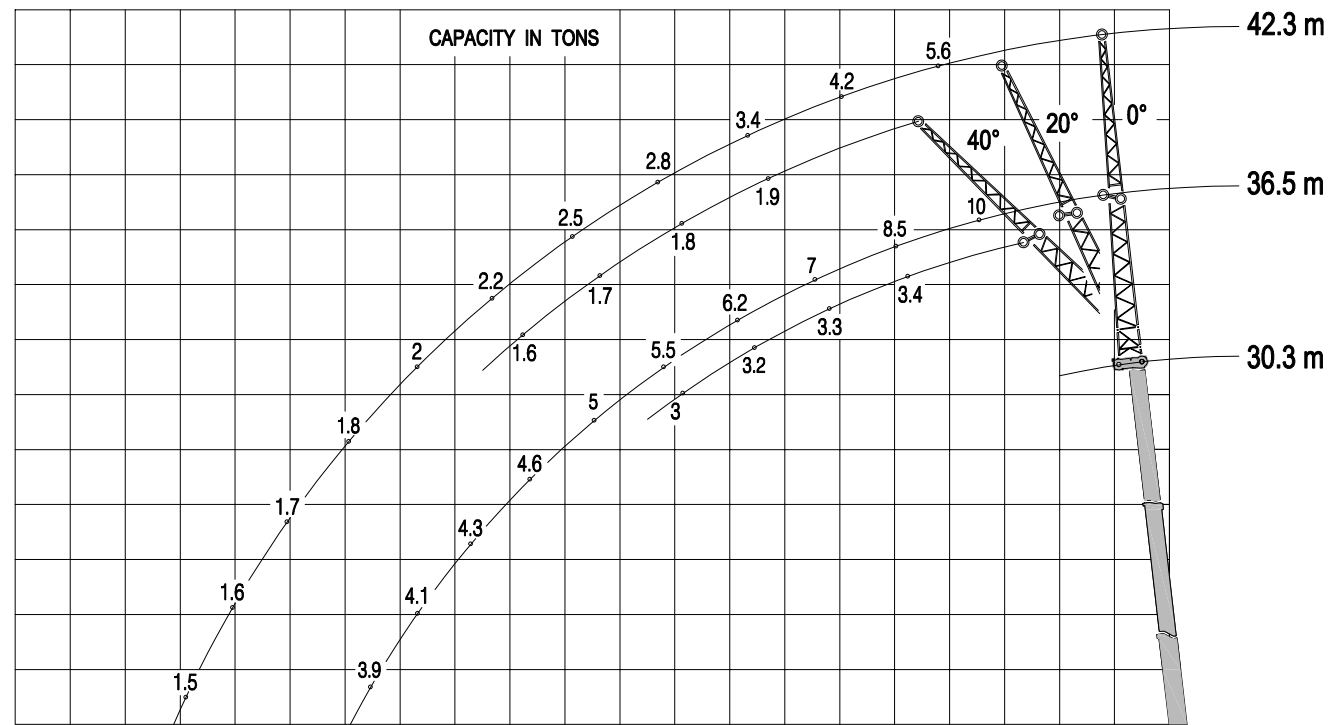


IDROGRU
CRANE



KT 200.33

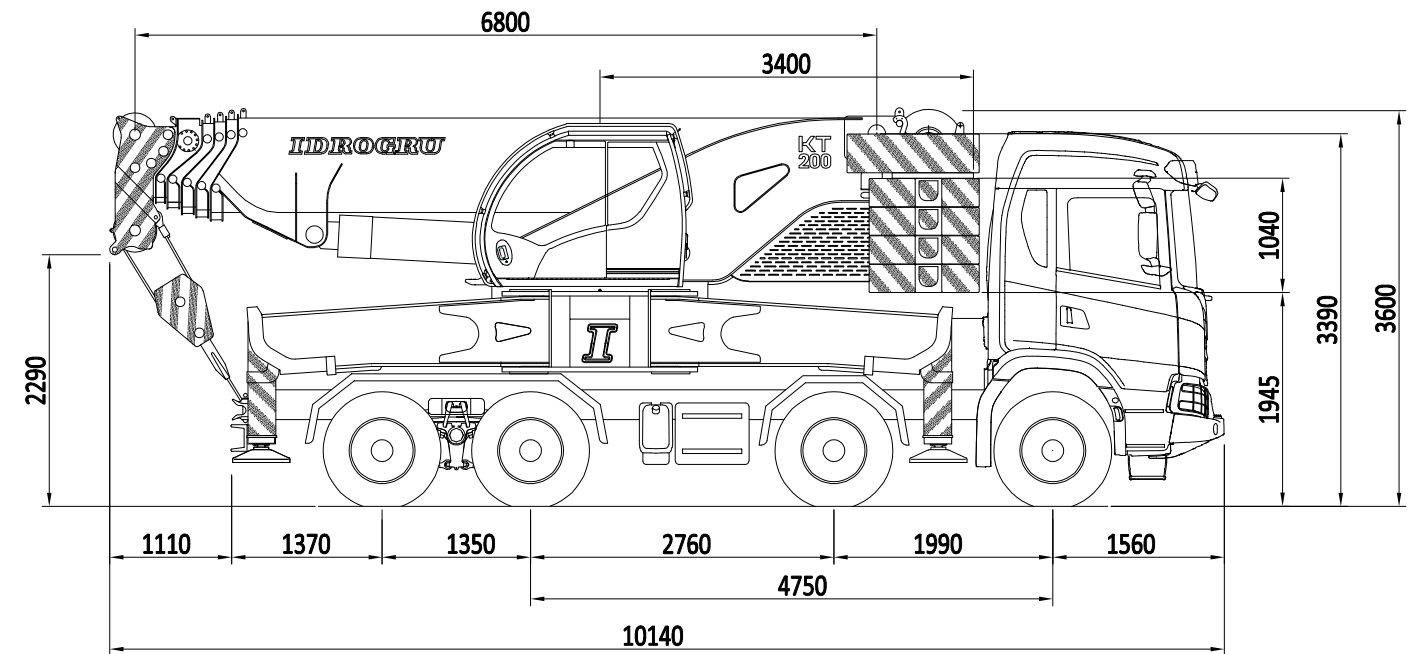


Divisible counterweight with automatic unloading

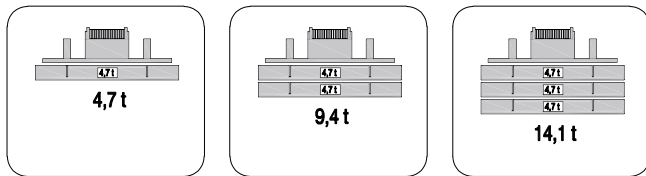


1,5 meters mechanic jib (for hook or pulley) with an extension of 1,5 meters.

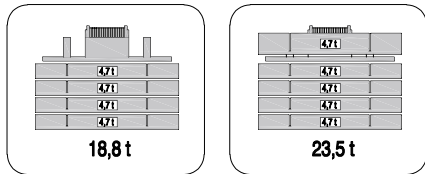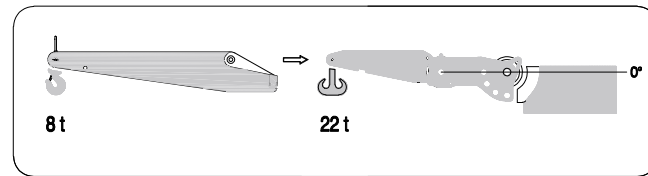


0,5 meters hook for reclinable boom head at -60° -30° 0°




Three position reclinable boom head

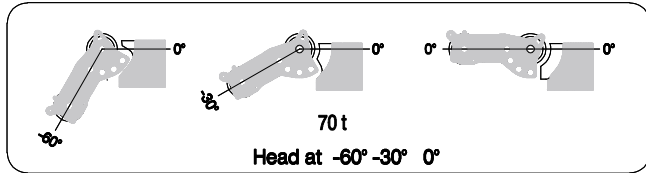


Hook blocks of various capacities

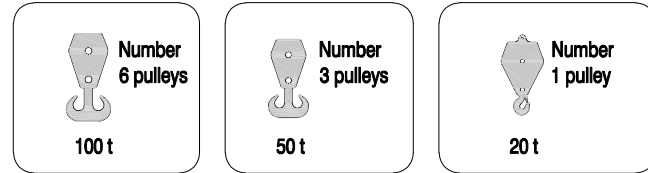


Primary winch

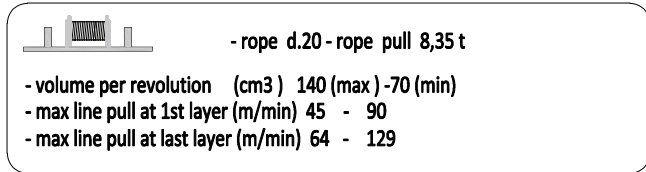



3 meters trellis jib


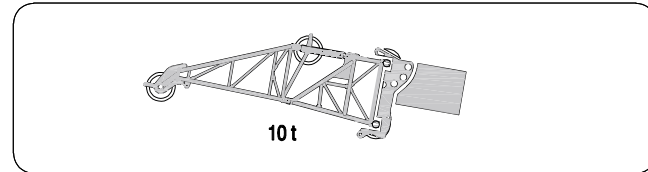


Double winch

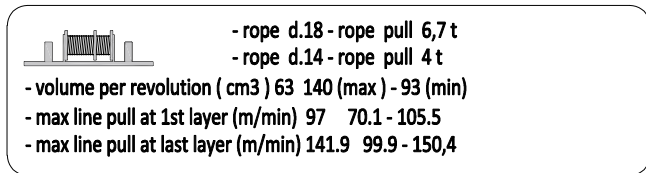

3,7 meters lift spreader beams

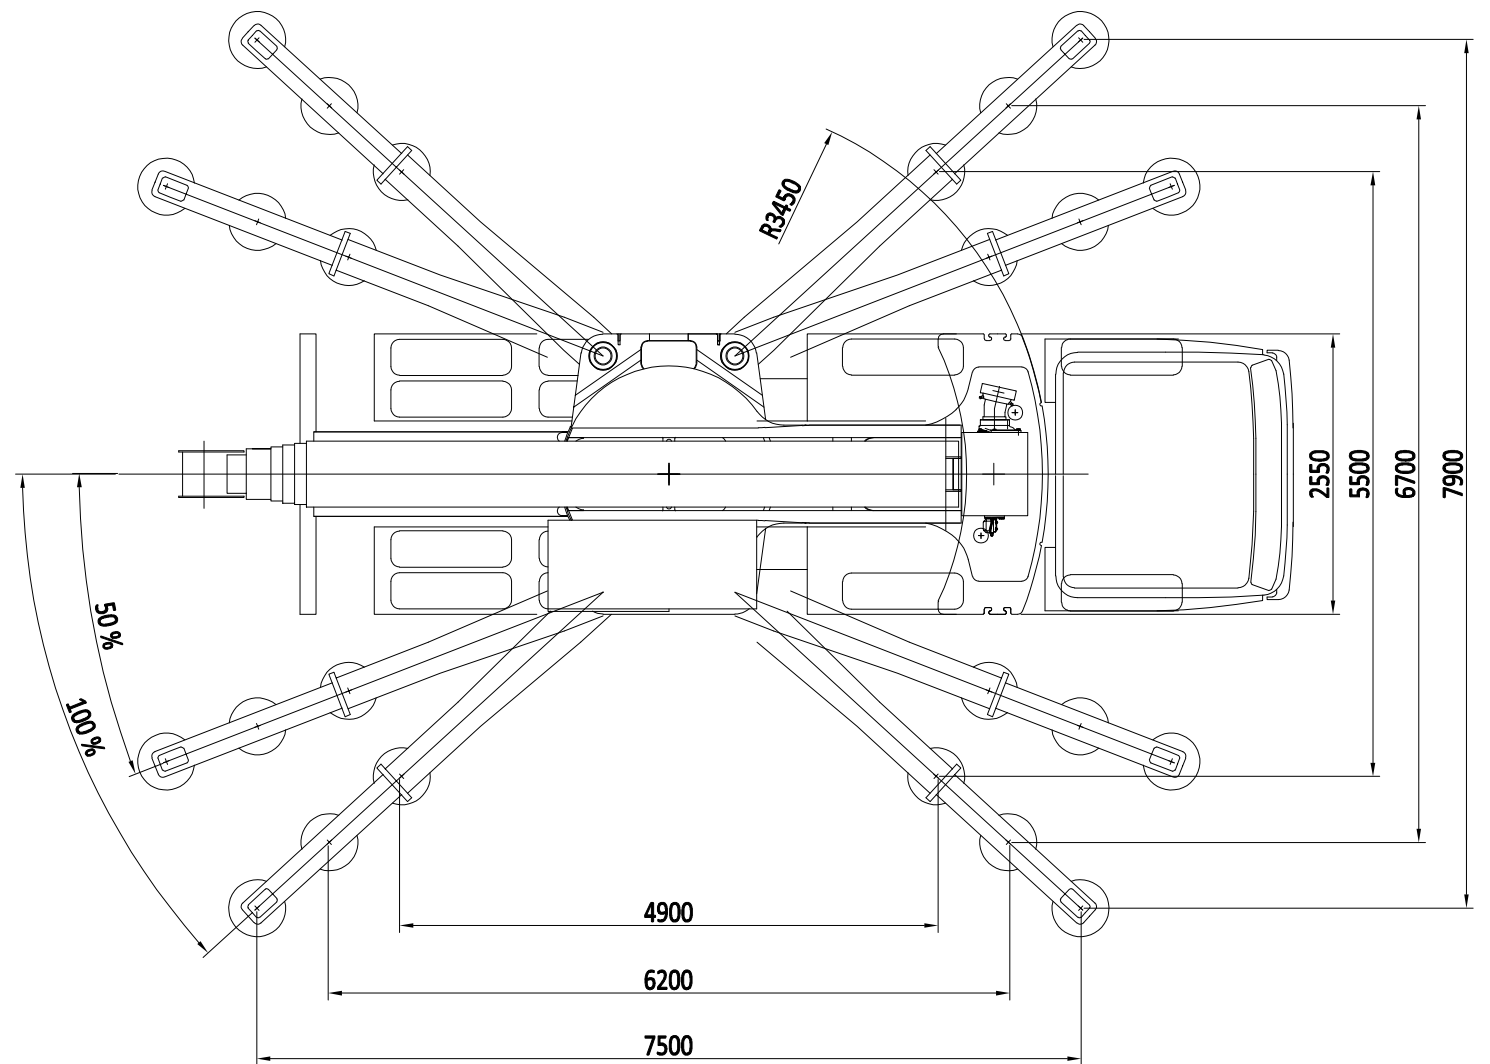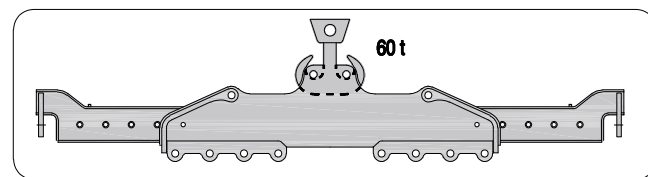

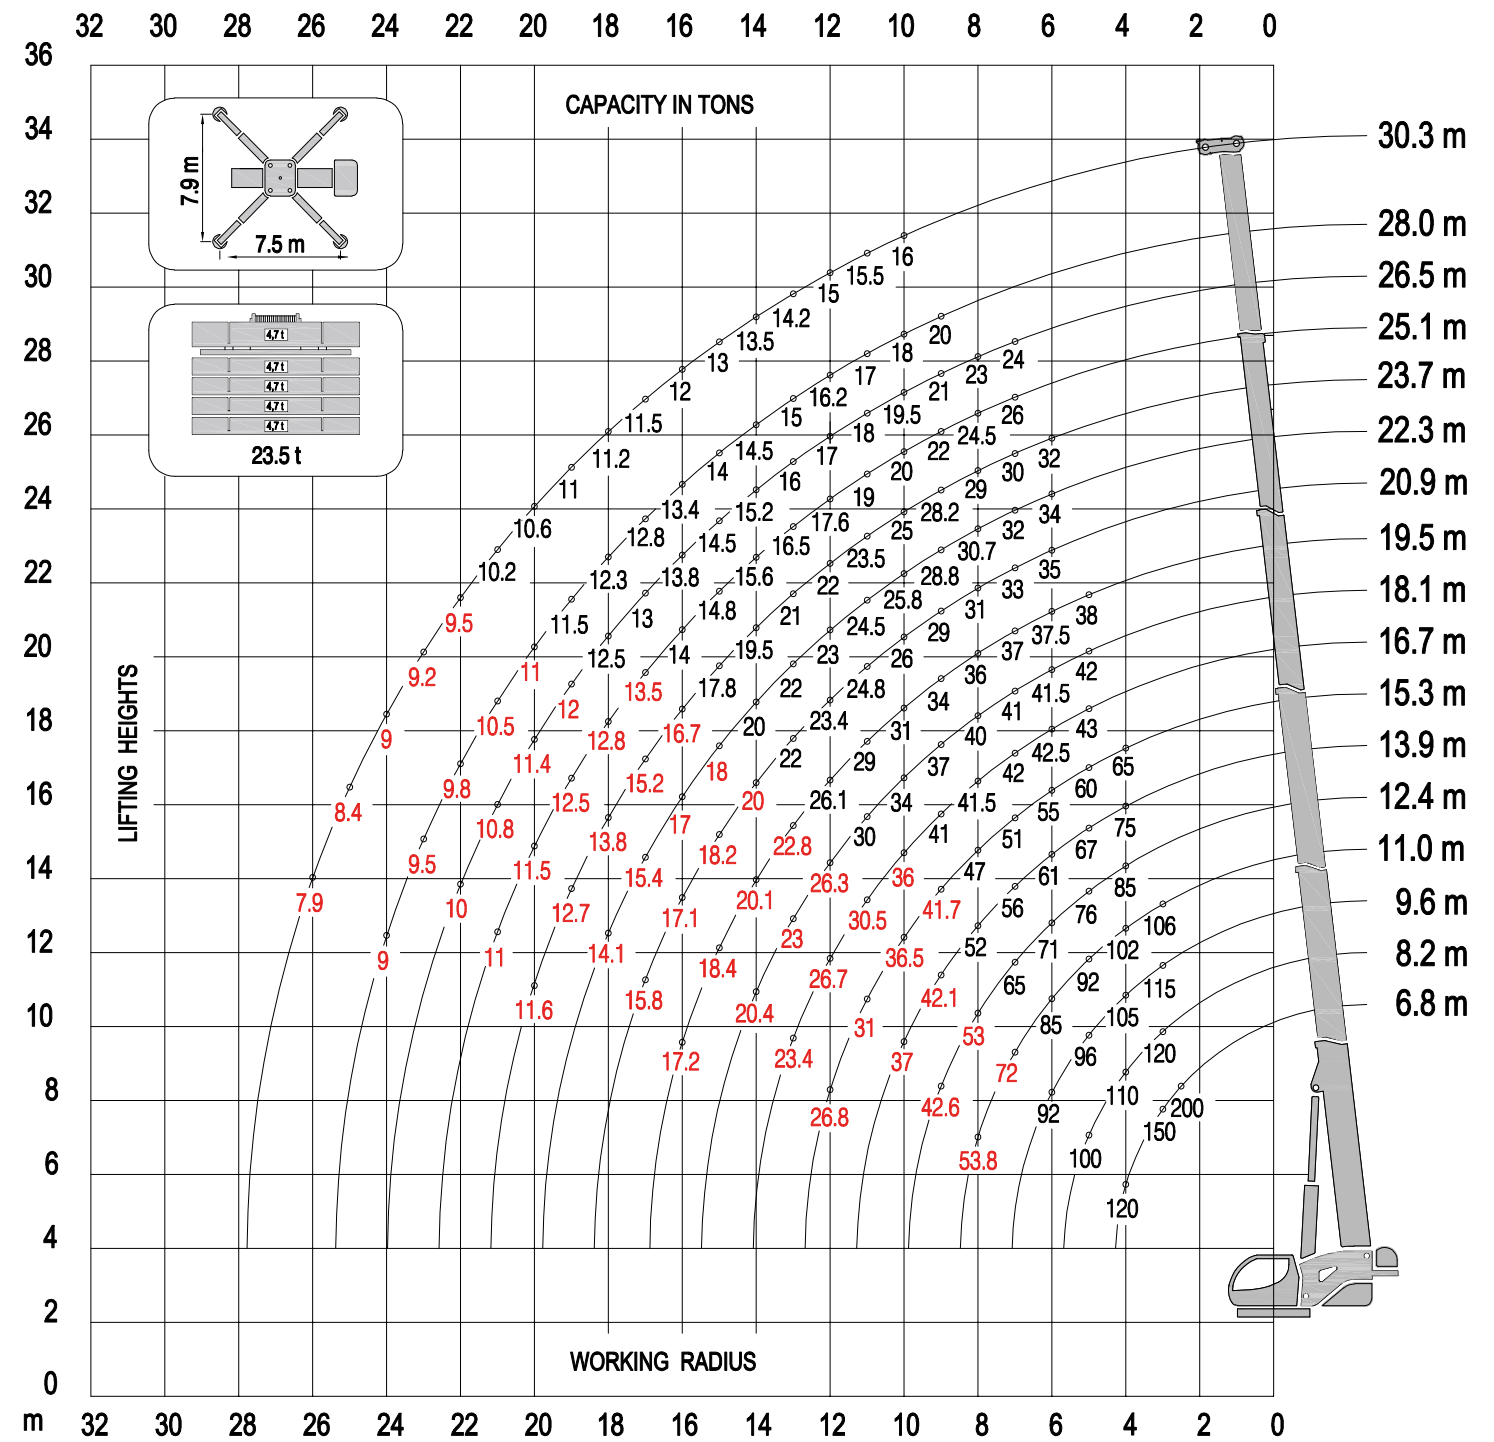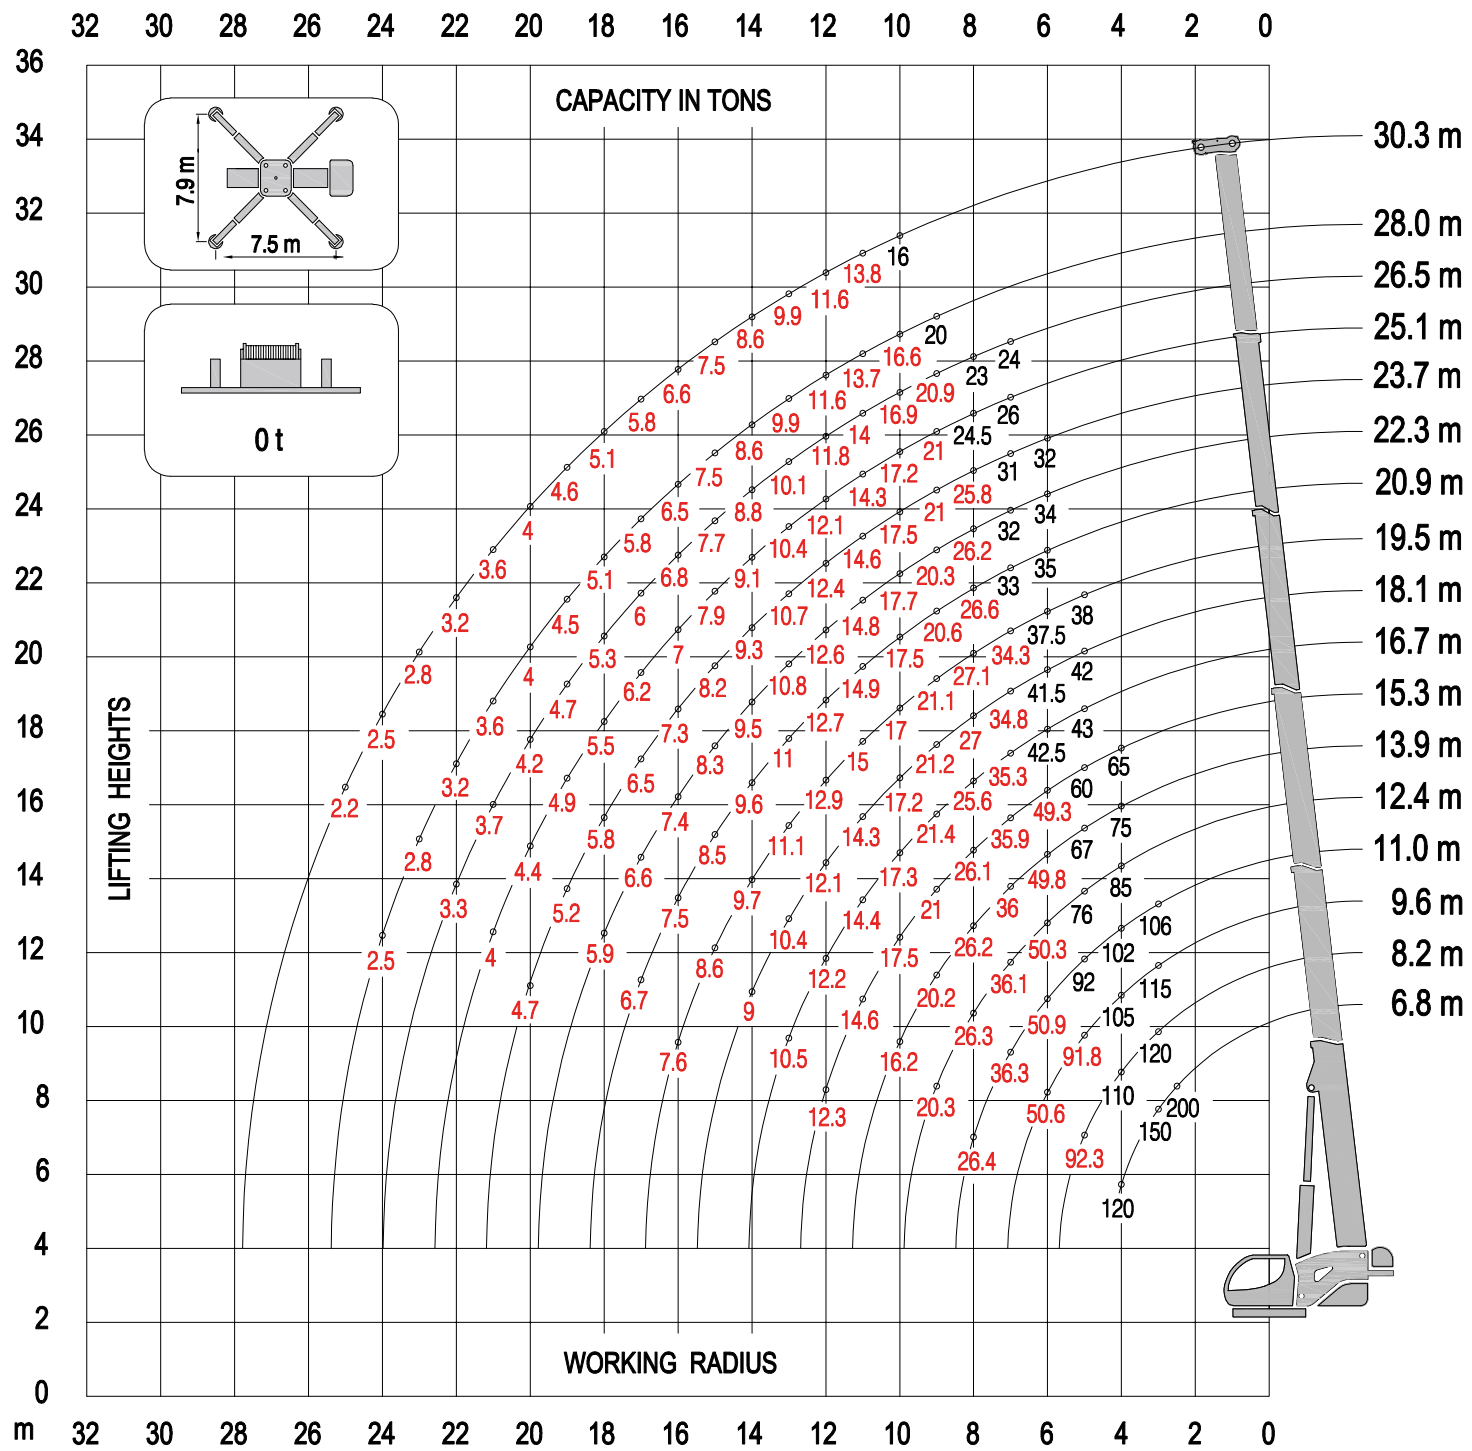

Max Payload: 100 t

The lifting capacities in the structural area are based on DIN 15018 part 3 / FEM 5.004 / EN 13000.
The lifting capacities in the stability area are based on DIN 15019 part 2 / ISO 4305 / EN 13000.