



Optional equipment: Hydraulic JT10.18

IDROGRU
CRANE



KT 200.50

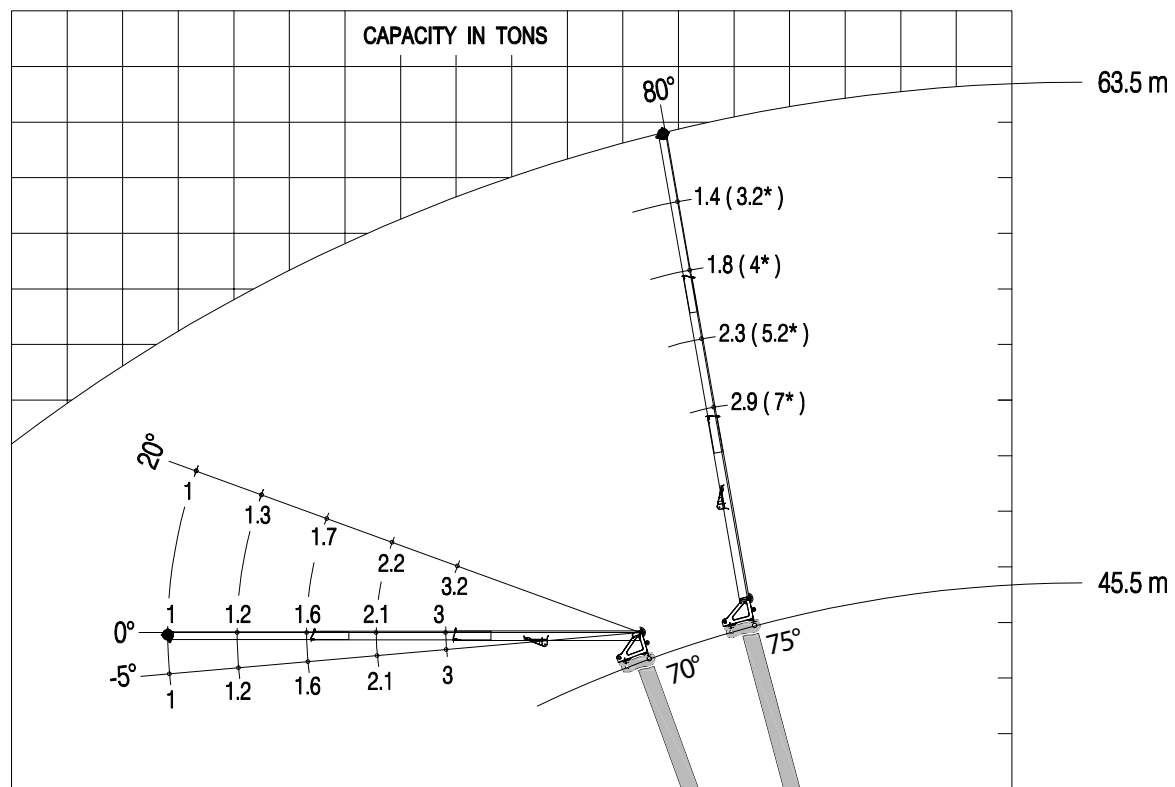


* Lifting capacity with boom length up to 29,1 m.

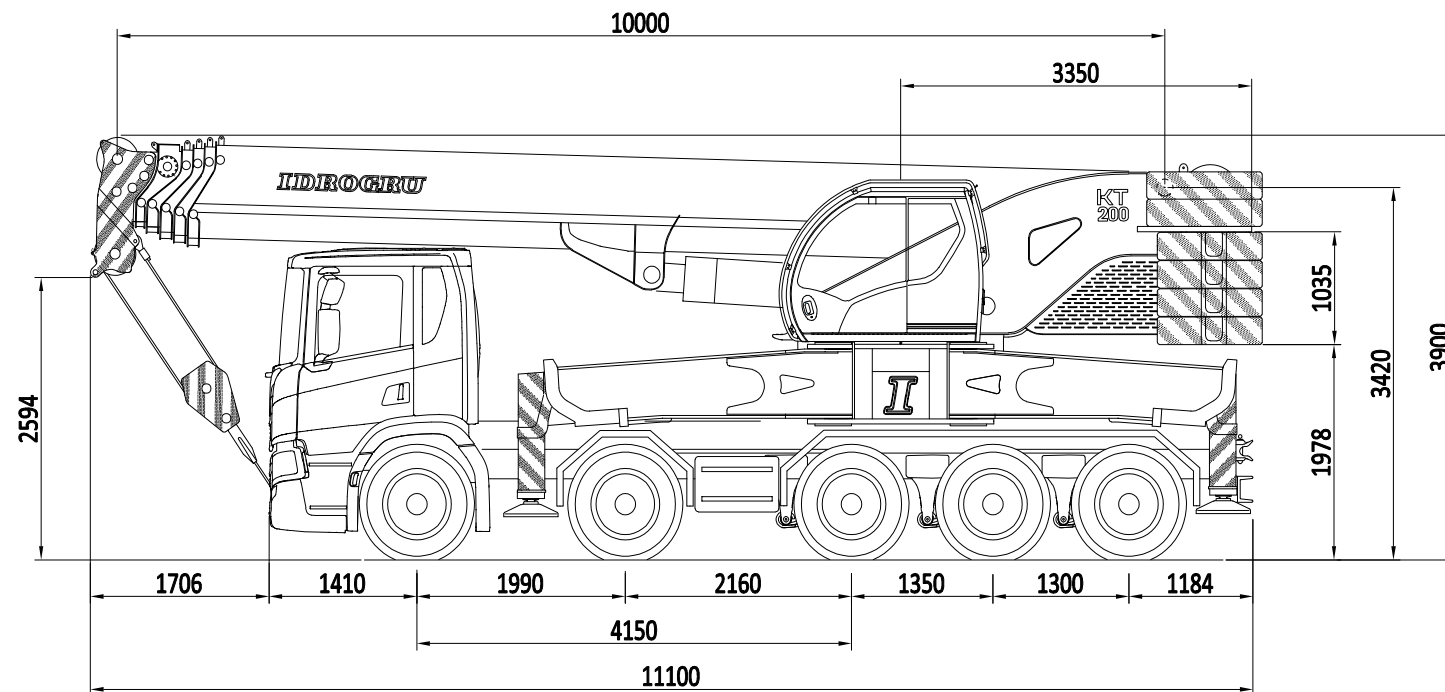


Divisible counterweight with automatic unloading

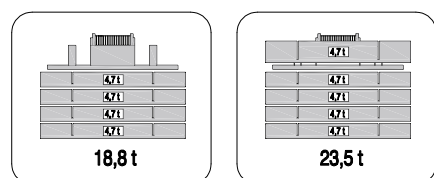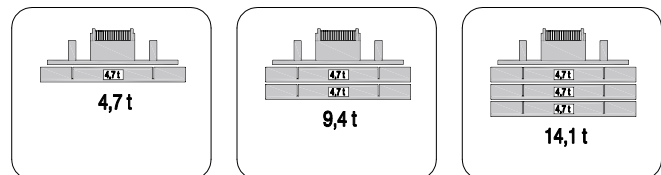


Three position reclinable boom head

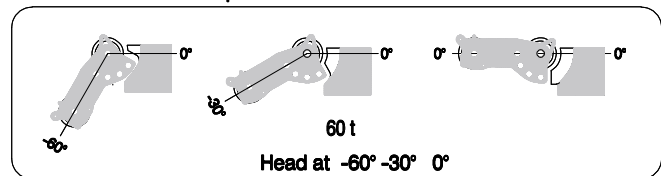


Primary winch

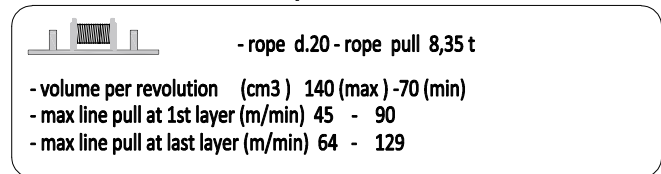


Double winch

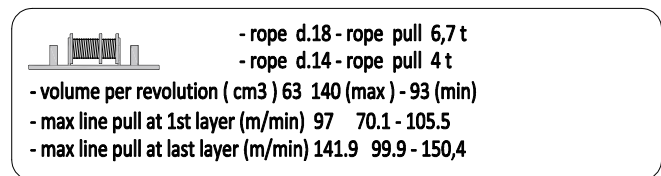


1,5 meters mechanic jib (for hook or pulley) with an extension of 1,5 meters.

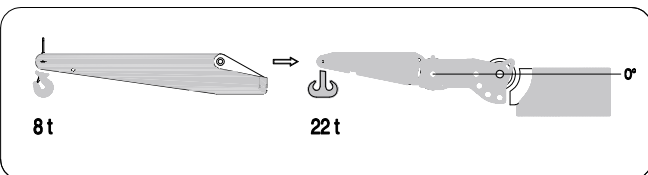


0,5 meters hook for reclinable boom head at -60° -30° 0°





Hook blocks of various capacities


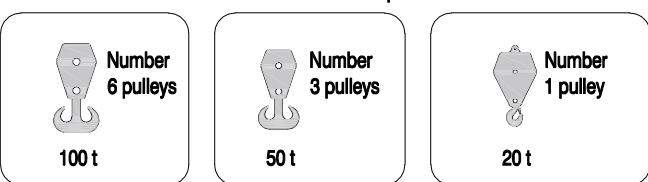


3 meters trellis jib

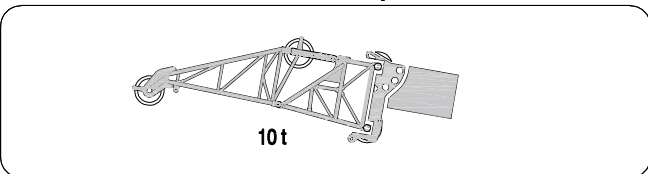

3,7 meters lift spreader beams

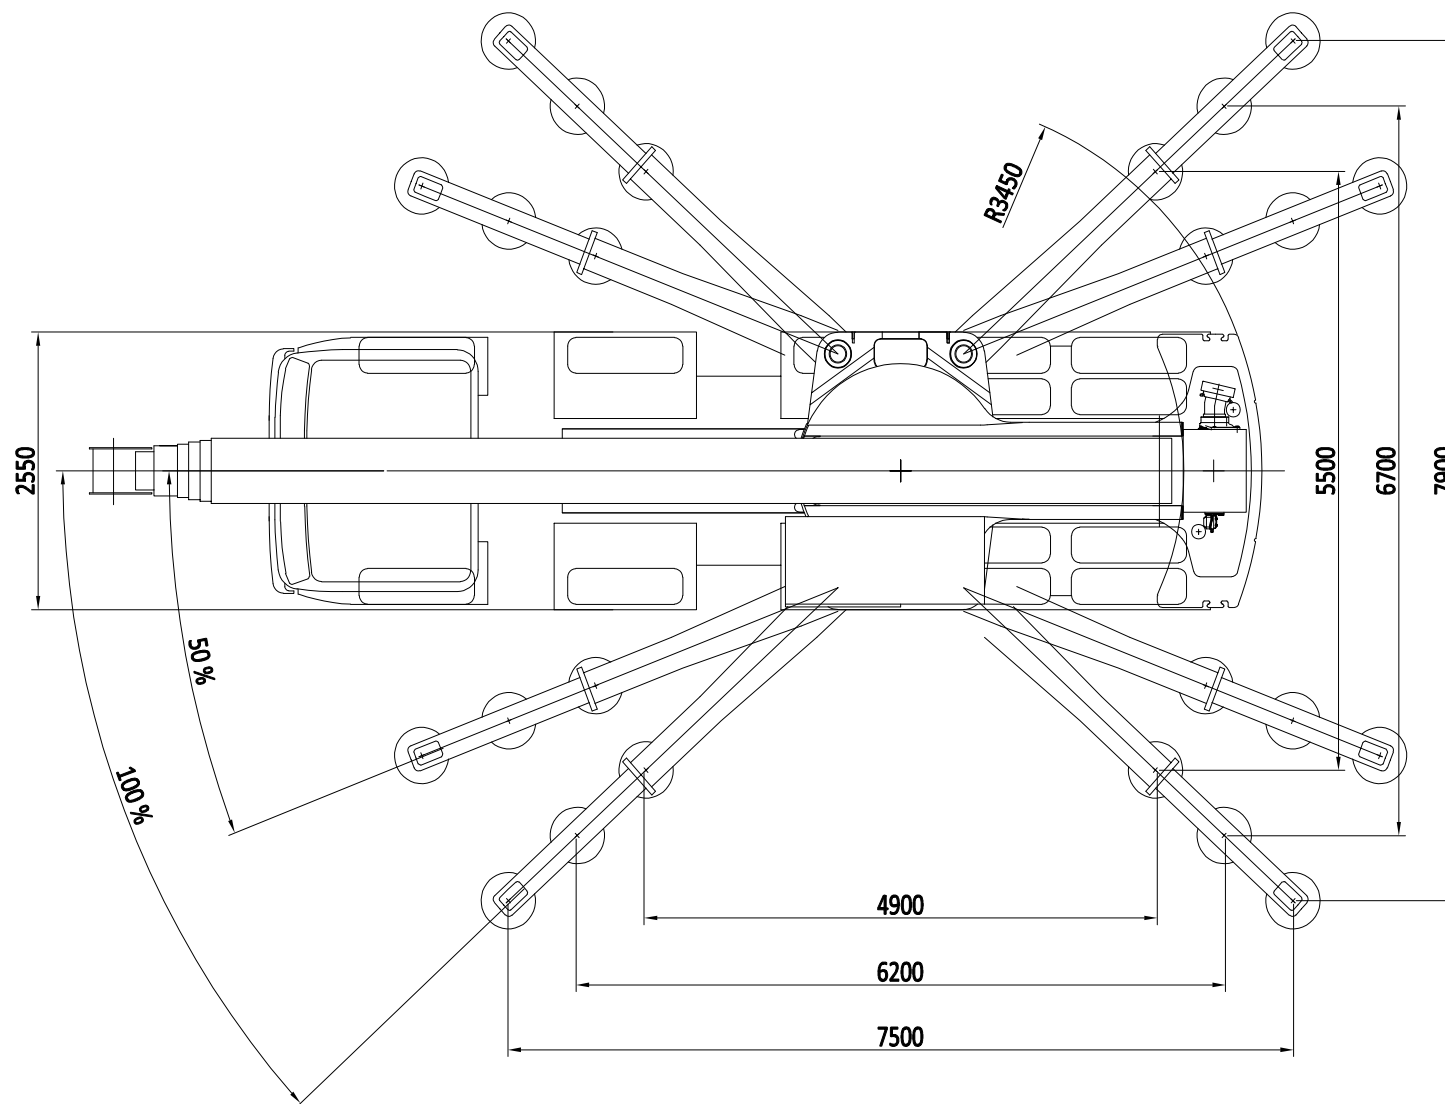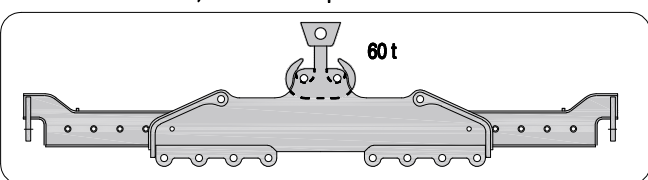

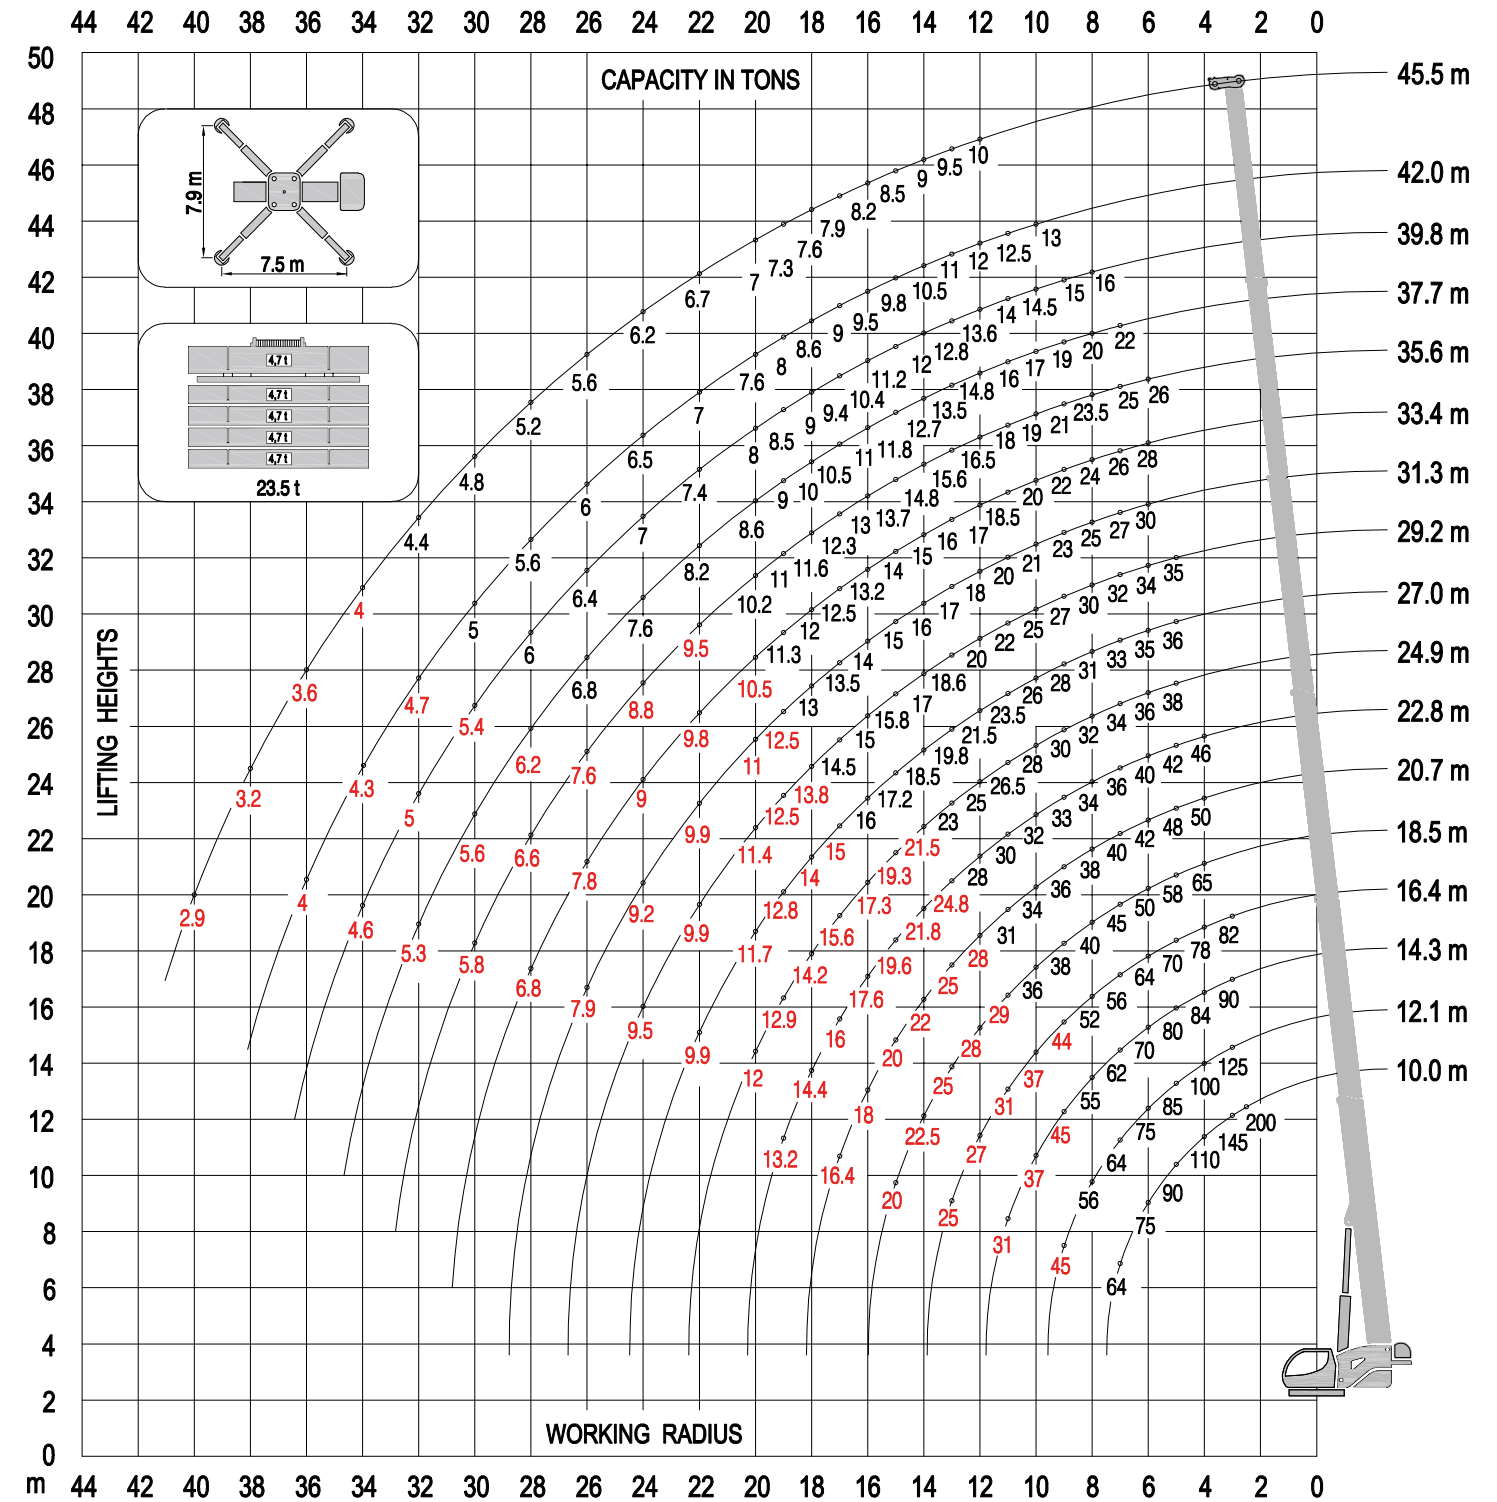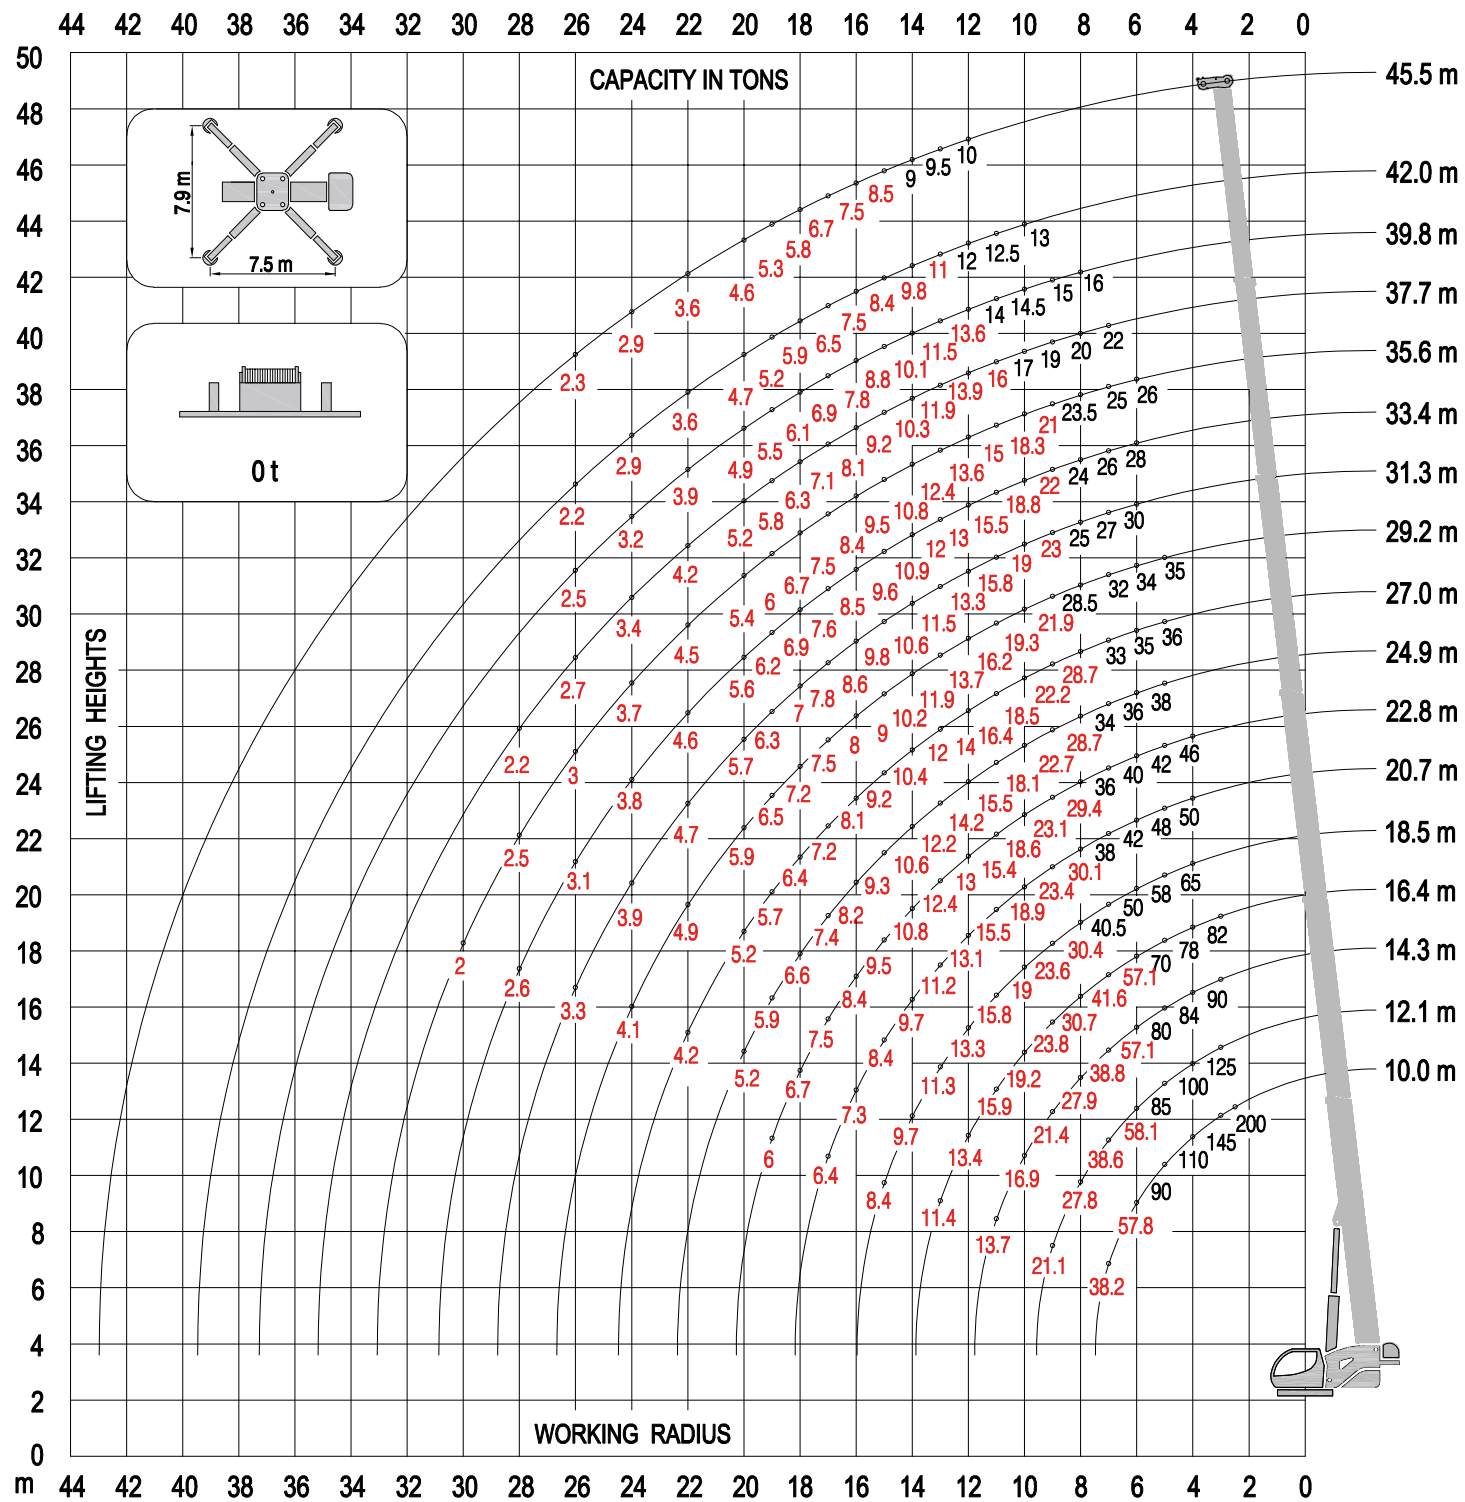

Max Payload: 100 t

The lifting capacities in the structural area are based on DIN 15018 part 3 / FEM 5.004 / EN 13000.
The lifting capacities in the stability area are based on DIN 15019 part 2 / ISO 4305 / EN 13000.