Optional Equipment

IDROGRU CRANE

KT200.36

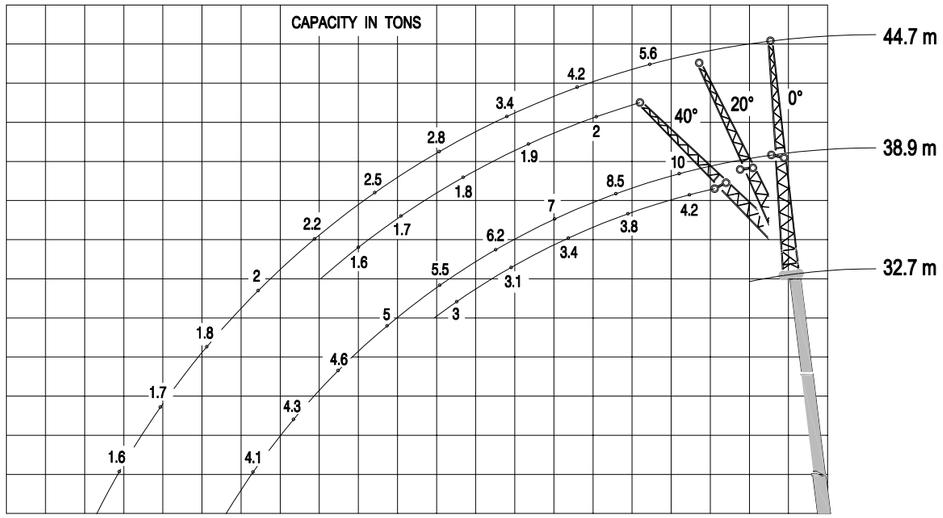

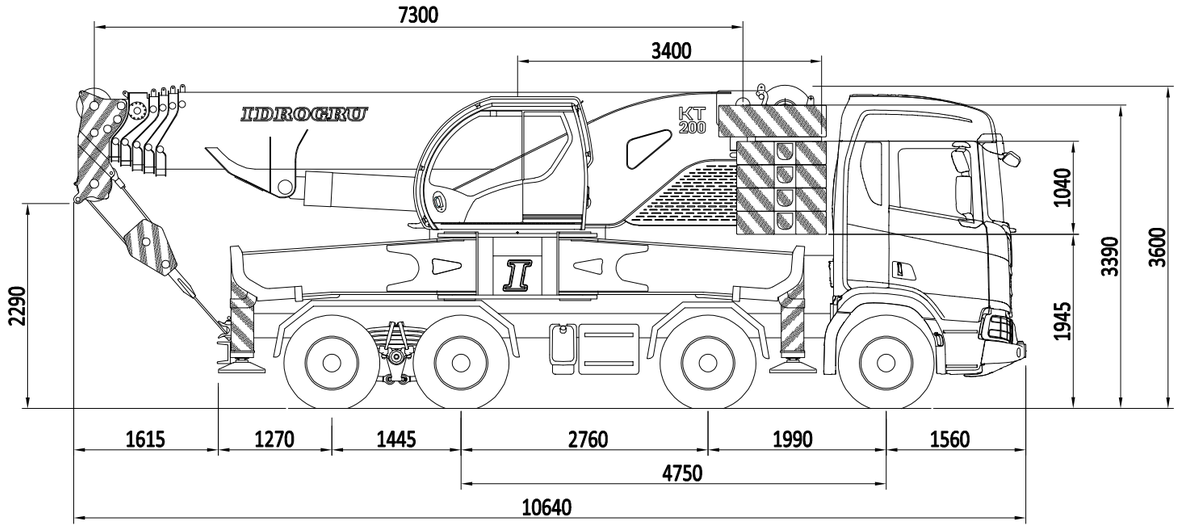

Divisible counterweight with automatic unloading

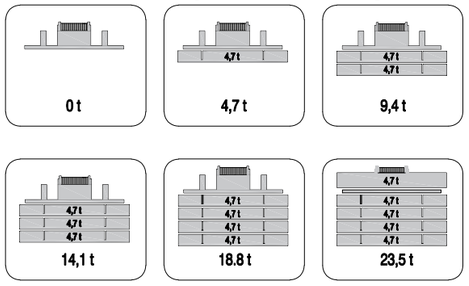

Three position reclinable boom head

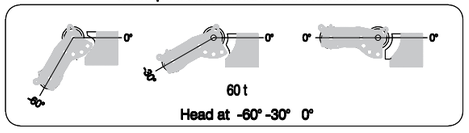

Primary winch

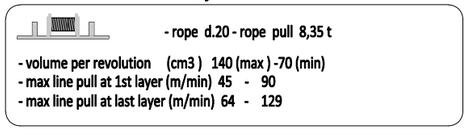

Double winch

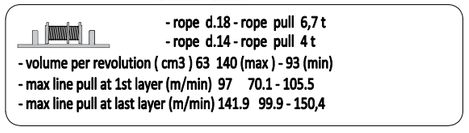

1,5 meters hook or pulley for reclinable boom head -60° -30° 0°

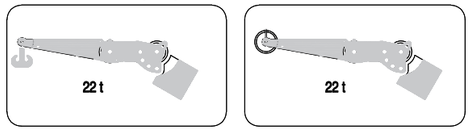

0,5 meters hook for reclinable boom head at -60° -30° 0°



Hook blocks of various capacities

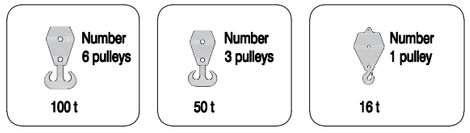

3 meters trellis jib

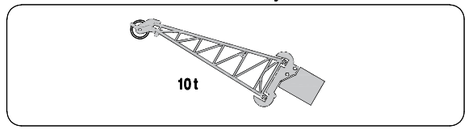

3,7 meters lift spreader beams

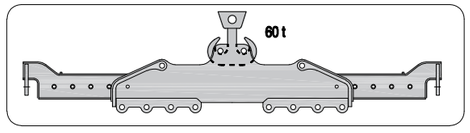

The lifting capacities in the structural area are based on DIN 15018 part 3 / FEM 5.004 / EN 13000.
The lifting capacities in the stability area are based on DIN 15019 part 2 / ISO 4305 / EN 13000

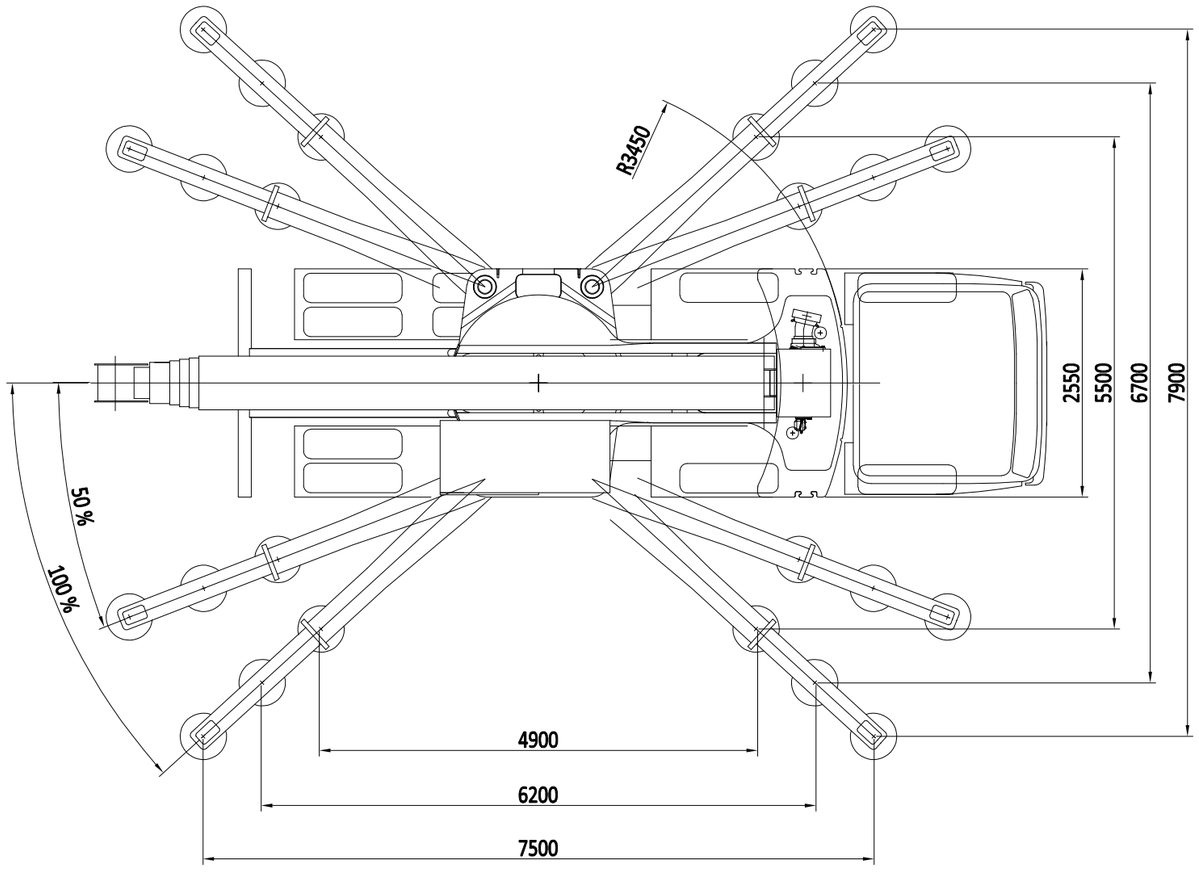

IDROGRU CRANE
Via Vecchione, 110/B, 41126 Modena, Italy
Tel. +39 059 923148 • info@idrogru.it
www.idrogru.it

KT200.36

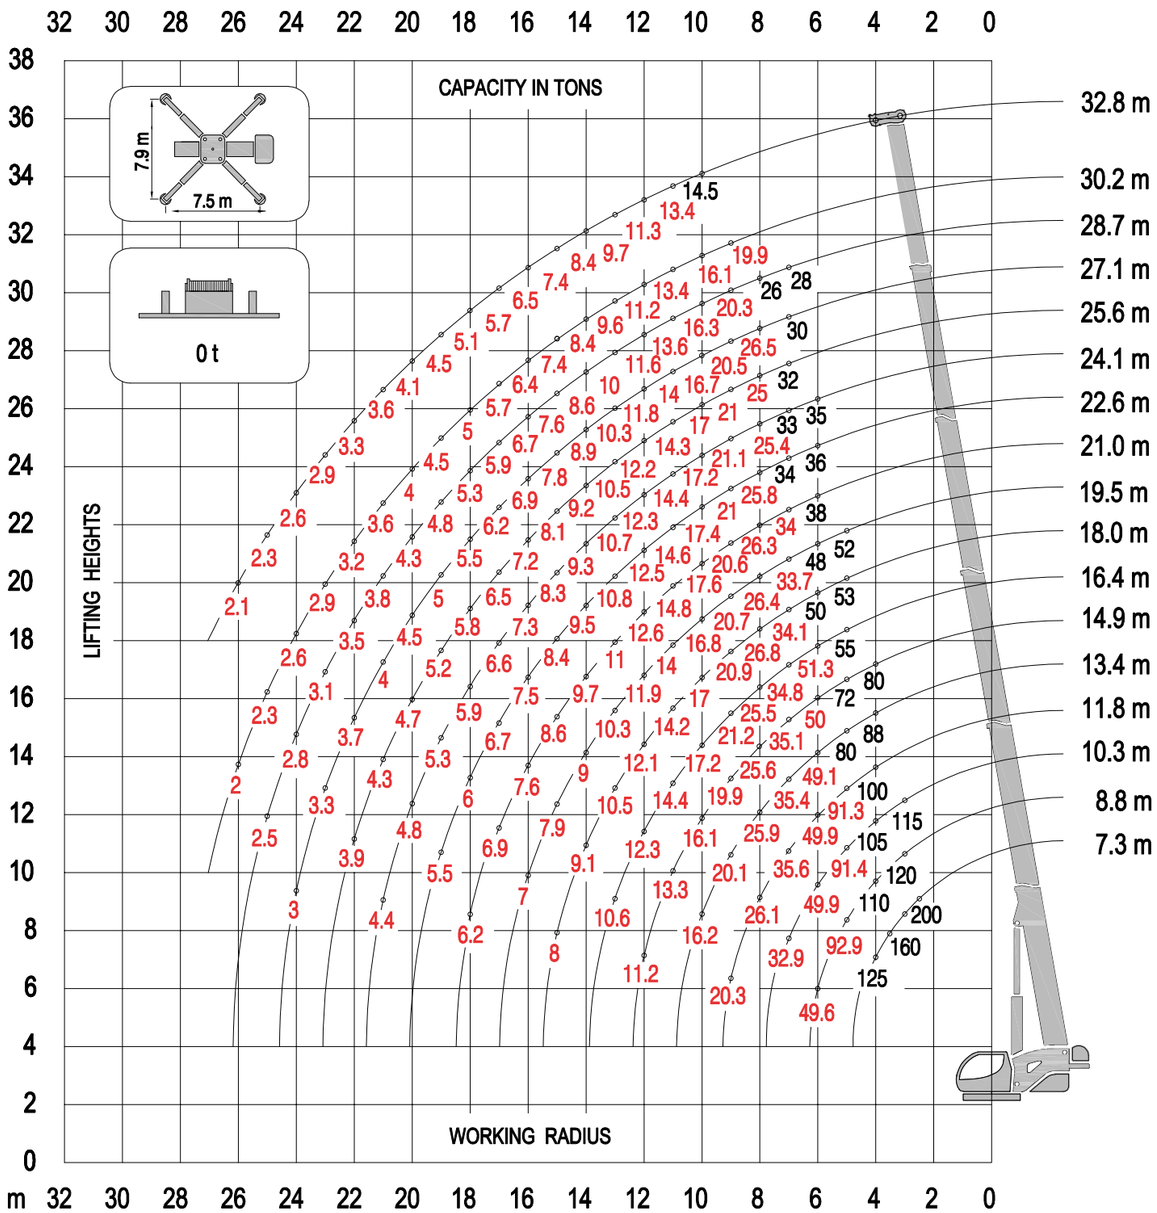
CAPACITY IN TONS
7.9 m
7.5 m
0 t
LIFTING HEIGHTS
WORKING RADIUS
32.8 m
30.2 m
28.7 m
27.1 m
25.6 m
24.1 m
22.6 m
21.0 m
19.5 m
18.0 m
16.4 m
14.9 m
13.4 m
11.8 m
10.3 m
8.8 m
7.3 m

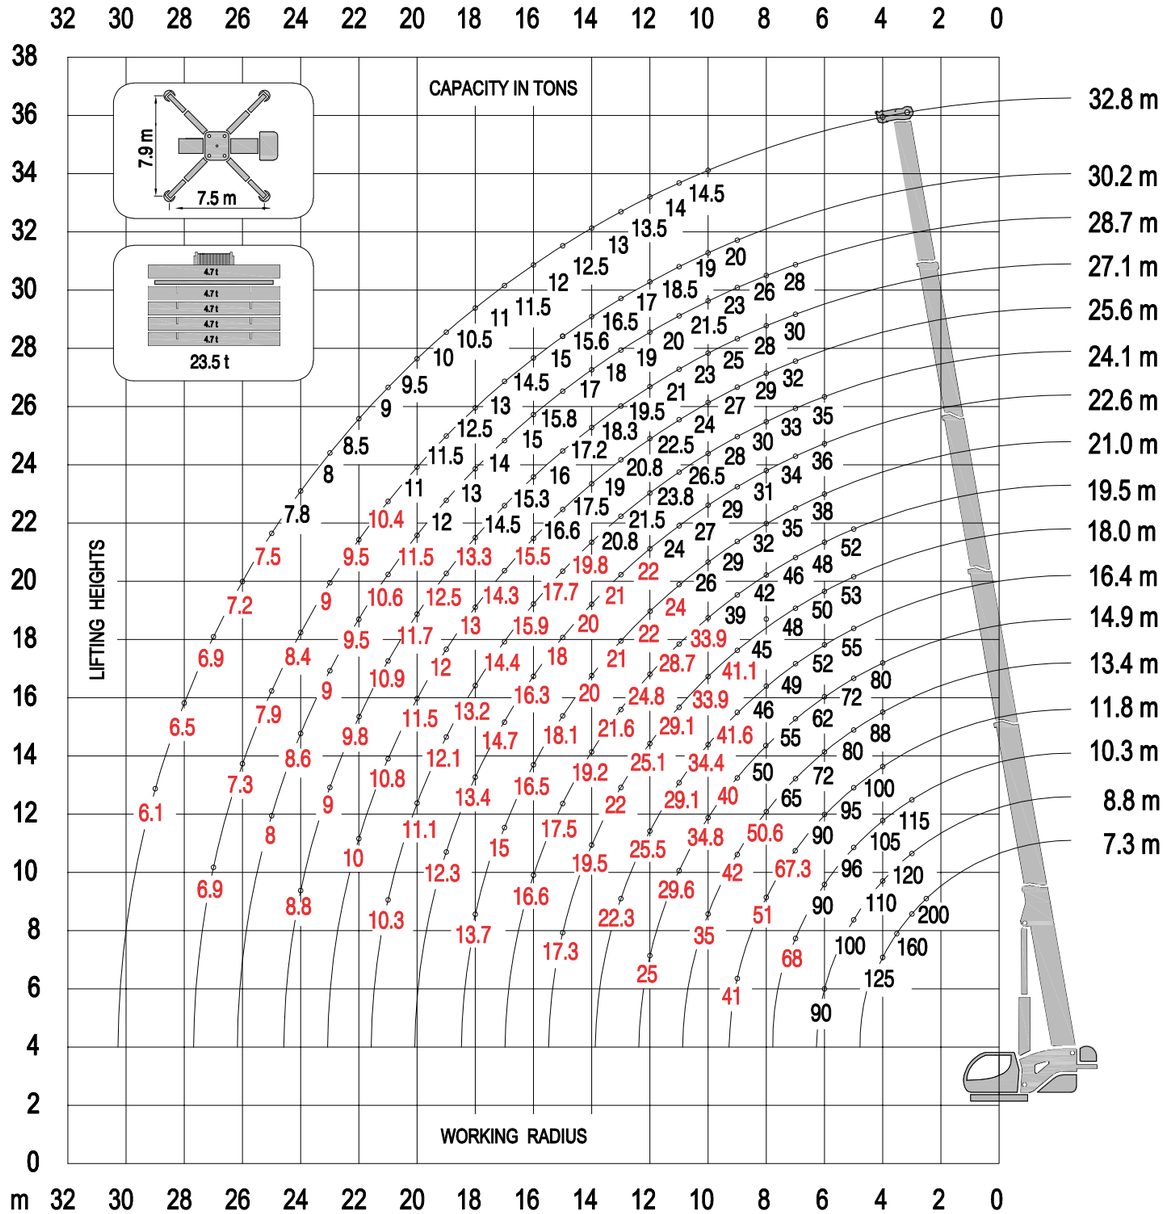
CAPACITY IN TONS
7.9 m
7.5 m
23.5 t
LIFTING HEIGHTS
WORKING RADIUS
32.8 m
30.2 m
28.7 m
27.1 m
25.6 m
24.1 m
22.6 m
21.0 m
19.5 m
18.0 m
16.4 m
14.9 m
13.4 m
11.8 m
10.3 m
8.8 m
7.3 m